



LAMPO EMERGENCY

MODEL ERU16



ELECTRICITY - COMPRESSED AIR - WATER PUMP - LIGHTING

POWER GENERATOR :

| | |
|----------------------|--|
| Intermittent power : | 17.6 kVA (14.1 kW) |
| Continuous power : | 16.0 kVA (12.8 kW) |
| Sound insulation : | Canopy 70dBA @ 7 m |
| Voltage : | 3 x 415 V - 1 x 240 V - 50Hz |
| Connections : | 1 x 32A 415V 5 pin CEE form outlet 1 x 15A 240V 3 pin outlet 1 x 10A 240V 3 pin outlet |

PUMP :

| | |
|-----------------------------|---|
| Manufacturer : | Gorman-Rupp |
| Type : | T4A60S-B |
| Free solids passage : | 76.2 mm |
| Electric motor : | 7.5kW |
| Controls : | Variable speed drive |
| Maximum speed : | 1500rpm |
| Maximum flow / pressure : | 42 l/s / 22 m |
| Suction lift : | - 7.6m |
| Suction / Discharge ports : | 4" (DN100) quick couplings (Bauer or others on request) |
| Suction piping : | 2 x Rubber hose DN100 2 meters 1 x Galvanized steel pipe DN100 2 meters 1 x Sewage suction strainer 1 x Bin suction strainer (low water level) |
| Discharge piping : | 1 x Flat delivery hose DN100 25 meters |

LIGHTING TOWER :

| | |
|---------------|-----------------------------------|
| Lamps : | IllumiLED |
| Power : | 4 x 100 W 90° lens |
| Light flux : | 61,400 Lumen |
| Colour : | 5,000 K White |
| Rotation : | 360° |
| Mast height : | Stowed : 2.0 m / Deployed : 6.0 m |

AIR COMPRESSOR :

| | |
|--------------------|------------|
| Capacity : | 6.0 liters |
| Maximum pressure : | 8.0 bar |

ENGINE :

| | |
|----------------|--|
| Manufacturer : | Yanmar |
| Model : | 3TNV88F |
| Capacity : | 1.6L - 3 Cylinders |
| Cooling type : | Liquid |
| Fuel tank : | 50 liters Diesel Fuel (10h operating time) |
| Controls : | ComAp IntelliLite MRS16 |
| Display : | Voltage, Amperage and Frequency indicators, Tachometer, Hourmeter, Fuel level, Alarms |




Lampo Emergency

by
Euromacchine
GROUP FORCE

TRAILER SPECIFICATIONS :

| | |
|---------------------------------|--|
| Type of trailer : | 4-Wheeled double axle over-the-road trailer |
| Capacity : | 2900 kg (ATM) |
| Deck, sides, guards : | Checker plates, including mudguards, front and side tie rails |
| Floor dimensions LxWxH : | 2750 x 1500 x 320 mm |
| Finish : | Hot dip galvanized |
| Wheels and tyres : | New 185R14 light truck tyres on 5 stud rims |
| Brakes : | Electric brakes |
| Lights : | LED lights including clearance lights on guards |
| Accessories : | 8" Swing up jockey wheel Min 200L alloy checker plate toolbox 4 x Corner steady drop down leg Spare wheel |

PUMP PERFORMANCE RANGE :

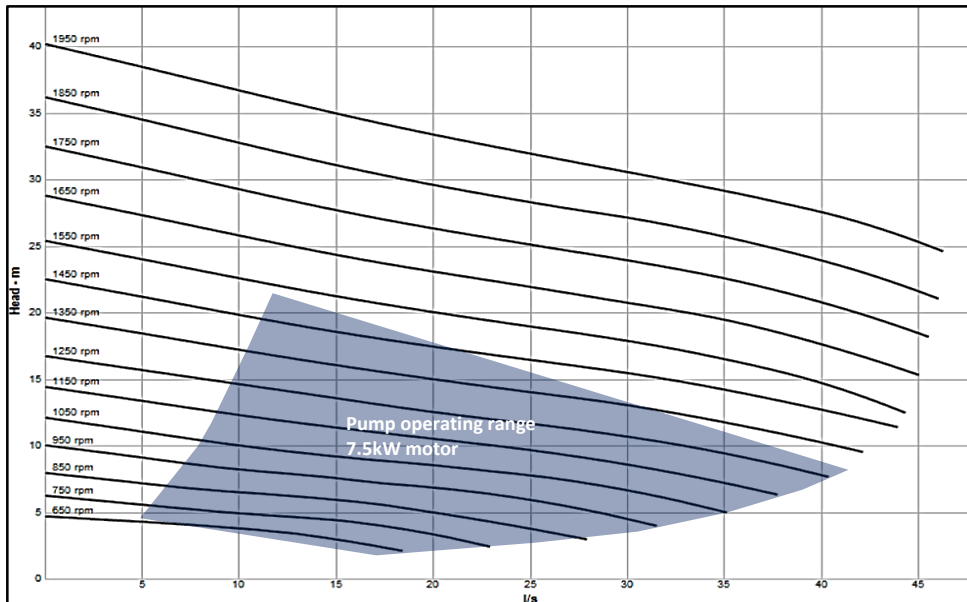

OPTIONS :

Portable pumps : Submersible pump 3" AMT 5763-95B 1 x 230 V
Submersible pump 1 1/2" AMT 5890-DC 12 VDC
Including 1 x Flat hose 1 1/2" (DN40) 20m



Other pumping equipment : On request



Portable trash pump



Hose kit



Portable high pressure pump