

ACDEU



**Priming Assisted Centrifugal Pump  
w/Autostart  
Model PAH3A60-6068H  
Size 6" x 3"**



Total Head		Capacity of Pump in U.S. Gallons per Minute (GPM) at Continuous Performance			
P.S.I.	Feet				
173.4	400	480	480	480	480
156.1	360	600	810	840	845
138.7	320	608	882	1000	1040
121.4	280	610	900	1075	1160
104.0	240	610	900	1100	1212
86.7	200	615	900	1100	1221
69.4	160	615	900	1100	1232
52.0	120	615	900	1100	1240
34.7	80	615	900	1100	1240
17.3	40	615	900	1100	1240
<b>Suction Lift</b>		<b>25'</b>	<b>20'</b>	<b>15'</b>	<b>10'</b>

Photo unavailable at time of publishing

**PUMP SPECIFICATIONS**

**Size:** 6" x 3" (152 mm x 76 mm) Flanged.  
**Casing:** Ductile Iron 65-45-12.  
 Maximum Operating Pressure 255 psi (1758 kPa).\*  
**Enclosed Type, Five Vane Impeller:** Ductile Iron 65-45-12.  
 Handles 1/2" (12,7 mm) Diameter Spherical Solids.  
**Suction Head:** Ductile Iron 65-45-12.  
**Suction Spool:** Gray Iron 30.  
**Impeller Shaft:** Alloy Steel 4140.  
**Replaceable Wear Ring:** Ductile Iron 65-45-12.  
**Bearing Pedestal:** Gray Iron 30.  
**Seal Plate:** Gray Iron 30.  
**Seal:** Mechanical, Oil-Lubricated, Double Floating, Self-Aligning. Silicon Carbide Rotating Face and Stationary Seat. Fluorocarbon Elastomers (DuPont Viton® or Equivalent). Stainless Steel 316 Cage and Spring. Maximum Temperature of Liquid Pumped 160°F (71°C).\*  
**Shaft Sleeve:** Stainless Steel 303/304.  
**Priming Chamber:** Gray Iron 30 Housing w/Stainless Steel Float and Linkage.  
**Discharge Check Valve:** Ductile Iron Housing w/Buna-N Flapper.  
**Radial Bearing:** Open Single Ball.  
**Thrust Bearing:** Open Double Ball.  
**Bearing and Seal Cavity Lubrication:** SAE 30 Non-Detergent Oil.  
**Gaskets:** Vegetable Fiber.  
**O-Rings:** Buna-N.  
**Hardware:** Standard Plated Steel.  
**Bearing and Seal Cavity Oil Level Sight Gauges.**  
*\*Consult Factory for Applications Exceeding Maximum Pressure and/or Temperature Indicated.*  
**Standard Equipment:** Gear-Driven Air Compressor. Hoisting Bail. Combination Skid Base w/Fuel Tank. Strainer. Single Ball Type Float Switch.\*\*  
**Optional Equipment:** Battery. Heated Priming Chamber Kit. Suction Vacuum and Discharge Pressure Gauge Kit. High Speed (55 MPH/89 KM/H) Tandem Axle Pneumatic-Tired Wheel Kit w/wo DOT-Approved Lights and Electric Brakes. Tandem Axle Over-the-Road Trailer (Meets DOT Requirements) Available w/Either Electric or Hydraulic Surge Brakes, Running Lights, Jack Stands and Safety Cables/Chains. EPS w/Submersible Transducer Liquid Level Sensor (50 Ft. [15M] Cable Standard, Alternate Lengths Available).  
*\*\*50 Ft. (15 m) Standard Length; Dual Switches and Alternate Cable Lengths Available From the Factory.*



**ENGINE SPECIFICATIONS**

**Model:** John Deere 6068H "Power Tech."  
**Type:** Six Cylinder, Four Cycle, Turbocharged, Charge Air Cooled, Enclosed, Liquid Cooled Diesel Engine.  
**Displacement:** 415 Cu. In. (6,8 liters).  
**Governor:** Electronic.  
**Lubrication:** Forced Circulation.  
**Air Cleaner:** Dry Type.  
**Fuel Tank:** 130 U.S. Gals. (492 liters).  
**Full Load Operating Time:** 22.3 Hrs.  
**Starter:** 12V Electric.

**Standard Features:** Low Oil Pressure, High Coolant Temperature and Start Failure Safety Shut Down Switches/Indicators. Fuel Level Sensor. Throttle Control. Autostart Instrument Panel Includes: Tachometer, Voltmeter, Hourmeter, Coolant Temperature and Oil Pressure Indicators, Manual/Stop/Auto Key Switch, 10 Amp Fuse, Audible Startup Warning Delay. Muffler w/Weather Cap.

**JOHN DEERE PUBLISHED PERFORMANCE:**  
 Maximum Gross BHP (Ind/Hvy Duty)  
 173 (129 kW) @ 2400 RPM



THE GORMAN-RUPP COMPANY • MANSFIELD, OHIO

GORMAN-RUPP OF CANADA LIMITED • ST. THOMAS, ONTARIO, CANADA

www.grpumps.com

Specifications Subject to Change Without Notice

Printed in U.S.A.



**Specification Data**

SECTION 43, PAGE 120

APPROXIMATE DIMENSIONS and WEIGHTS

NET WEIGHT:  
SHIPPING WEIGHT:  
EXPORT CRATE SIZE:

CONSULT FACTORY  
CONSULT FACTORY  
426 CU. FT. (12 CU. M.)

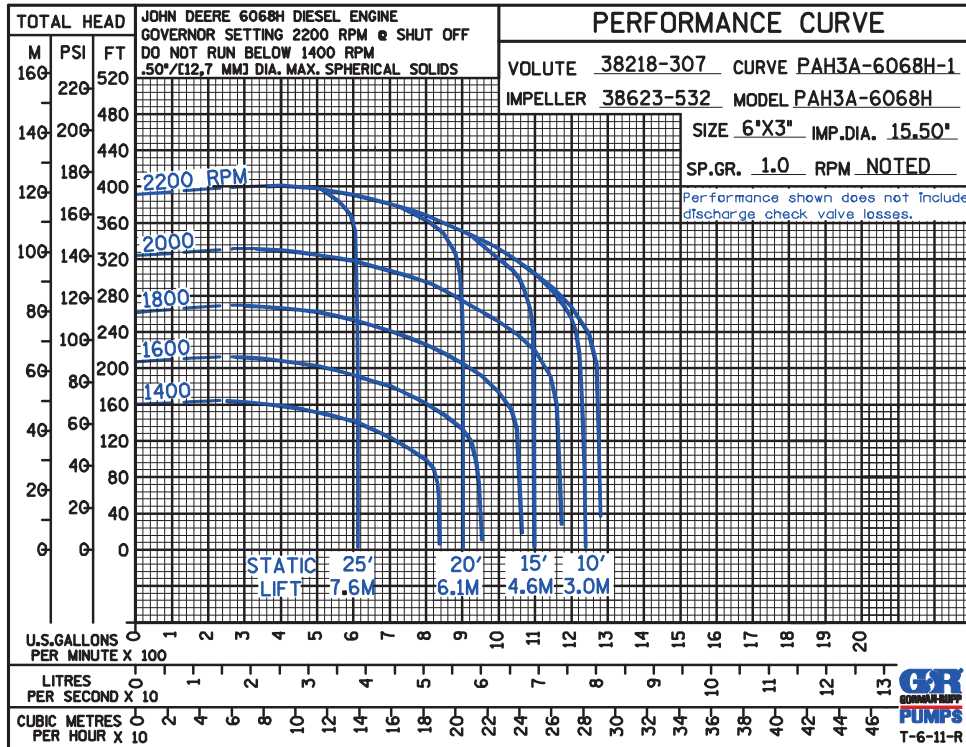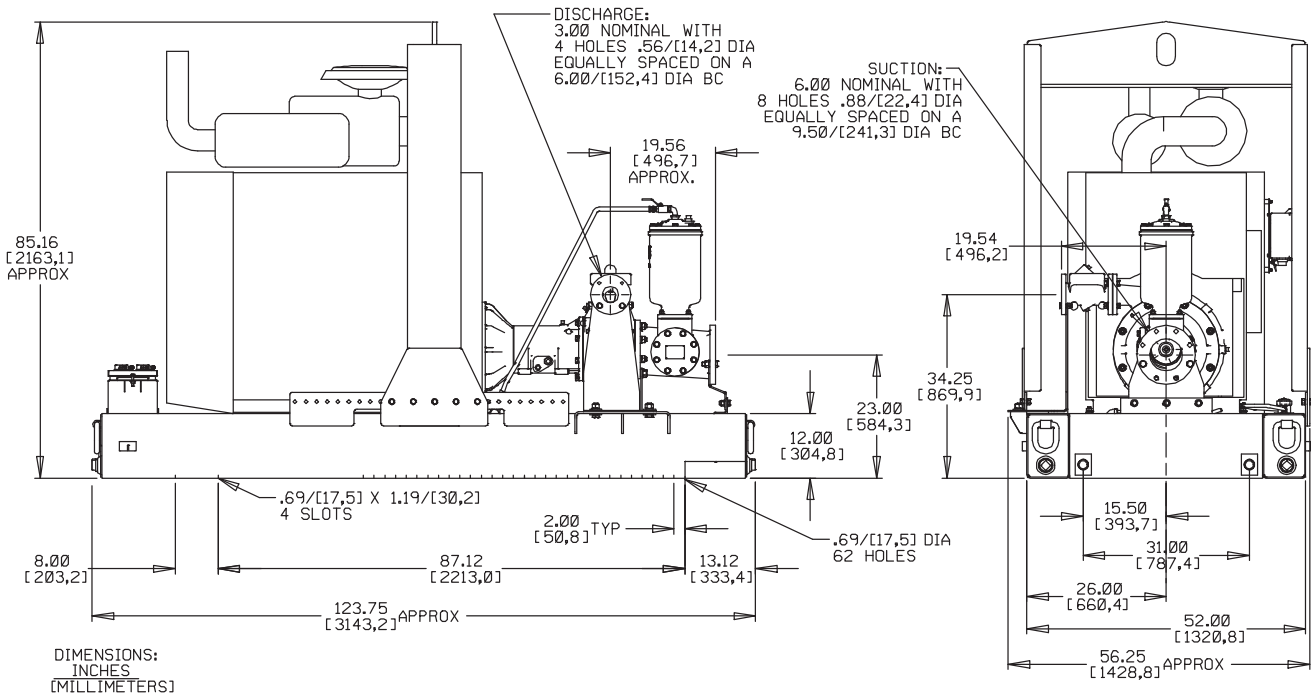

THE GORMAN-RUPP COMPANY • MANSFIELD, OHIO

GORMAN-RUPP OF CANADA LIMITED • ST. THOMAS, ONTARIO, CANADA

Specifications Subject to Change Without Notice

Printed in U.S.A.